



अखिल भारतीय आयुर्विज्ञान संस्थान, नागपुर  
ALL INDIA INSTITUTE OF MEDICAL SCIENCES, NAGPUR

Plot No - 2, Sector - 20, MIHAN, Nagpur- 441108

Email: - [se@aiimsnagpur.edu.in](mailto:se@aiimsnagpur.edu.in)

Ph. No.0712-2352035



सत्यमेव जयते

ENGINEERING DEPARTMENT

No: AIIMS-NAG/Engg/HVAC/2026-27/NIQ/91

Date: 24/06/2026

**NOTICE INVITING QUOTATIONS**

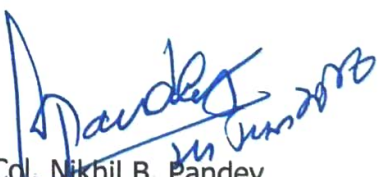
The Director AIIMS, Nagpur invites sealed quotations for "SITC of 2 Nos. 4 TR Cassette Type Split Air Conditioners with Automatic Timer-Based Changeover System for UPS cum Server Room, Department of Radiation Oncology, AIIMS Nagpur".

Sr No	Item Description	Qty	Unit	GST In %	Rate with GST	Amount with GST
1	Supply, Installation, Testing & Commissioning (SITC) of 4.0 TR Ceiling Mounted 4-Way Cassette Type Inverter Air Conditioner of minimum 3-Star BEE rated, complete with indoor and outdoor units, high-efficiency inverter compressor, copper condenser and evaporator coils, built-in condensate drain pump, wireless remote controller, washable air filters, factory-charged R-32 / R-410A refrigerant with PCB of both IDU & ODU should be in mettalic box for fire protection including Automatic Timer-Based Changeover Panel for alternate operation of two numbers 4 TR Cassette Type Split Air Conditioners, comprising programmable digital timer, power contactors of suitable rating complete as required by Engineer in charge. and all standard accéssories at existing false ceiling complete as required by Engineer in charge.	2	No.			
2	supplying, laying/fixing, testing and commissioning of appropriate nominal refrigerant copper pipe of 9.52 mm dia (OD) for liquid line/suction line supply and return piping of suitable gauge (hard copper pipe for liquid main line and soft copper pipe for refrigerant) along with necessary supports, hangers, clamps, vibration isolators and fittings such as bends, tees, valves, gauges, strainers with insulation of 19mm thick elastomeric nitrile rubber along with application of multicoating of VRV/VRF piping for protection against mechanical damages, fungal growth, flame spread, water permeance and ultraviolet radiations with OEM standards of VRV/VRF air conditioning system complete.	18	m			
3	supplying, laying/fixing, testing and commissioning of appropriate nominal refrigerant copper pipe of 15.88 mm dia (OD) for liquid line/suction line supply and return piping of suitable gauge (hard copper pipe for liquid main line and soft copper pipe for refrigerant) along with necessary supports, hangers, clamps, vibration isolators and fittings such as bends, tees, valves, gauges, strainers with insulation of 19mm thick elastomeric nitrile rubber along with application of multicoating of VRV/VRF piping for protection against mechanical damages, fungal growth, flame spread, water permeance and ultraviolet radiations with OEM standards of VRV/VRF air conditioning system complete.	18	m			

4	Providing, laying, testing and commissioning of 4 Core x 2.5 sq.mm FRLS PVC insulated, PVC sheathed, 1100 V grade copper conductor cable conforming to IS 694/IS 1554, laid on surface/in existing cable tray/conduit, with plug top complete with necessary fixing accessories, glands, lugs, ferrules, dressing and termination as required.	30	m			
5	Outdoor standfabrication :-Supply, fabricationand erection of angle/channel/flat iron stand, hanging arrangement for air conditioning machines & ducts etc, back/support clamps or other similar work etc. including nut bolts of required size,making holes, fabrication,welding, cutting, etc. and painting with one coat of red oxide paint & two coat of enamel paint as required as per specification.	2	No.			
6	Drain piping :-Providing and fixing of CPVC, 6Kg/cm2 drain water piping of 32mm diameter with fittings, support and insulated with 6mm thick closed cell elastomeric nitrile rubber insulation complete as per	25	m			
<b>Total Amount Including GST</b>						

Terms & Conditions: -

- 1) All quotation to be submitted in the name of Director, AIIMS, Nagpur only. **Quotation not addressed to the Director, AIIMS, Nagpur will not be opened & rejected summarily.**
- 2) The Vendor should submit his quotation after downloading the uploaded NIQ form duly signed & stamped.
- 3) Rate of items should be quoted per unit item excluding GST & GST should be mentioned in GST column separately.
- 4) The 100% payment shall be release within 30 Days after submission of Tax invoice and successfully receipt of materials, checking make of each delivered item.
- 5) Liquidated damages charges: - In the event of not supplying materials, Liquidity Damage Charges will be deducted at the rate of 0.5% of the contract price of the delayed /undelivered, stores/services mentioned above for every week of delay or part their of a week, subject to the maximum value of the Liquidated Damages being not higher that 10% of the value of delayed stores.
- 6) Bank details such as Account Number, IFSC code etc. should be furnished so as to facilitate payment online if any.
- 7) Time Period for completion of work:- **45 Days** from the date of issue of work order.
- 8) Interested parties should submit their quotation through hard copy in Admin Building Ground Floor Addressed to Director, AIIMS, Nagpur and scribing "**SITC of 2 Nos. 4 TR Cassette Type Split Air Conditioners with Automatic Timer-Based Changeover System for UPS cum Server Room, Department of Radiation Oncology, AIIMS Nagpur**" on or before 06 - July-2026 before 17.00 hours which will be opened on 07 - July -2026 at 11.00 hrs.
- 9) Agency should submit the "Annexure A" duly filled-in and signed.
- 10) The work will be awarded to the lowest (L1) eligible firm/bidder for all items consolidated.
- 11) Right to accept/reject any quotation rest with the AIIMS, Nagpur.

  
Lt. Col. Nikhil B. Pandey  
लेफ्टिनेंट कर्नल निखिल बी. पांडे  
Superintending Engineer  
अधीक्षक अभियंता  
AIIMS, Nagpur  
अ. भा. आ. सं. नागपुर  
अधीक्षक अभियंता  
Superintending Engineer  
अधीक्षक अभियंता  
All India Institute of Medical Sciences  
3 page  
Nagpur - 461008

**ANNEXURE- 'A'**  
**Form for Detailed Information of Consultant.**

**Name of work: - "SITC of 2 Nos. 4 TR Cassette Type Split Air Conditioners with Automatic Timer-Based Changeover System for UPS cum Server Room, Department of Radiation Oncology, AIIMS Nagpur".**

1.	Name of the Vendor/Supplier	
2.	Permanent Account Number (PAN)	
3.	Complete Postal Address of the Vendor /Supplier.	
4.	Particular of Bank Account.	
	a) Name of Bank.	
	b) Name of Bank Branch	
	c) Branch Code	
	d) Address	
	e) City	
	f) Telephone/ Mobile Number.	
5.	Legal status of Vendor/Supplier (Attach documents)	
	a) An Individual	
	b) A Proprietary Firm	
	c) A Firm in Partnership	
	d) A limited company or corporation	
6.	GST Registration Number	
7.	Valid Email ID of the Vendor/Supplier.	

**Signature of the Vendor/Supplier**