

अखिल भारतीय आयुर्विज्ञान संस्थान, नागपुर

ALL INDIA INSTITUTE OF MEDICAL SCIENCES, NAGPUR

Plot No - 2, Sector - 20, MIHAN, Nagpur- 441108

Email ID: - se@aiimsnagpur.edu.in, eecivil@aiimsnagpur.edu.in

ENGINEERING DEPARTMENT



AIIMS/NAG/ENGG/CIVIL/NIQ/ Guest House/25-26/ 80

Dated: -02/02/2026

1089

NOTICE INVITING QUOTATION

The Executive Director AIIMS Nagpur invites sealed quotation for "Provision of Wall panelling in Dining area and Terrace Shaft Covering Works in Guest House building and Window Safety Grills in Adranwala Hostel at AIIMS Nagpur" from the vendors having similar kind of work experience

NIQ No. : - AIIMS/NAG/ENGG/CIVIL/NIQ/ Guest House /25-26/ 80

Name of Work: - "Provision of Wall panelling in Dining area and Terrace Shaft Covering Works in Guest House building and Window Safety Grills in Adranwala Hostel at AIIMS Nagpur"

Schedule of Quantities

S/N	Description of Item	Quantity	Unit	Unit Rate	Amount (₹)
1	Structural steel work in built-up section, fixed with or without connecting plate, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	1211.00	Kg.		
2	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade Two or more coats on new work over an under coat of suitable shades with ordinary paint of approved brand	78.00	Sq.m		
3	Pre- painted galvalume aluminum zinc coating GI based corrugated steel sheet 0.50mm thick of an colour having tensile strength of 550 Mpa as in roof covering/cladding to wall, fixed with self-tapping Screws as specified	82.00	Sq.m		
4	Taking out existing CC interlocking paver blocks from footpath/ central verge, including removal of rubbish etc., disposal of unserviceable material to the dumping ground and stacking of serviceable material within 50 meter lead as per direction of Engineer-in-Charge. (This item is to be measured where paver block have come out of area and gap is more).	98.00	Sq.m		
5	Laying old cement concrete interlocking paver blocks of any design/ shape laid in required line, level, curvature, colour and pattern over and including 50 mm thick compacted bed of coarse sand, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge. (Old CC paver blocks shall be	98.00	Sq.m		


	supplied by the department free of cost) (This item is to be measured where paver block have come out of area and gap is more, however crushed sand / coarse sand shall be spread over the surface to re-fixing in serviceable area).				
6	Providing and fixing in position pre-cast R.C.C. manhole cover and frame of required shape and approved quality Rectangular shape 600x450 mm or similar internal dimensions as per site requirement	10.00	each		
7	Supplying and fixing of interlocking PVC fluted wall Panel system (8-10 mm thickness) with superior grade adhesive, Fastening with Screw, finishing etc. and all accessories complete including making the wall rough before applying adhesive for proper bonding with the wall. The wall Panel shall be confirming to ASTM D-4477, Fire resistant, Moisture resistant, Anti-Bacterial, Termite proof. All the works carried out as per the direction of Engineer-in-charge. (Rate including Taxes, labour charges, Transportation and all).	193.00	sq.m		
8	Providing, Fixing and Transporting of ACP Acrylic 3D letters Board glow sign board having name of "TRANSIT HOSTEL" (20 in x 12 ft) 12 inch letter height or similar over backlit board of size (12 ft x 2 ft) All the works carried out as per the direction of Engineer-in-charge. (Rate including Taxes, labour charges, Transportation and all).	1.00	Job		
GST Amount (Considering 18 %)					
Total Amount including GST (₹)					

Terms & Conditions of NIQ:

- 1) All quotation to be submitted in the name of Executive Director, AIIMS Nagpur only. Quotation not addressed to the Executive Director, AIIMS Nagpur will not be opened & rejected.
- 2) The work shall be completed within **60 Days** from the date of issue of work order.
- 3) The work shall be carried out as per specification and as per direction of Engineer-in-charge.
- 4) All material, labour and machineries shall be arranged by the agency himself at own cost. Item no 7 PVC panel and item no 8 Glow sign board with Backlit Board's sample photographs attached as Annexure-B for reference.
- 5) Rate of items should be quoted per unit item excluding GST & GST should be mentioned in GST row separately & all applicable Taxes and nothing extra shall be paid on this account.
- 6) The vendors should submit quotation in uploaded NIQ or firm's letter head as per format form duly signed & stamped.

Handwritten signature and date:
02 Feb 2026

- 7) Bank details such as Account Number, IFSC code etc. should be furnished so as to facilitate payment online.
- 8) It will be deemed that work so measured, checked and paid is of the required quality and standard, both in respect of ingredients as well as the intended functions it is supposed to perform. In other words, the work shall not only meet the required / CPWD specifications but also the workmanship as per sound engineering practices.
- 9) Liquidated damages charges: - In the event of the delayed completion of work within stipulated period, Liquidated damage charges will be deducted to the sum of 0.5 % the contract amount of the delayed / undelivered, stores /services mentioned above for every week of delay or part their of a week, subject to the maximum value of the liquidated damages being not higher than 10 % of the value of delayed services.
- 10) Interested parties should submit their quotation through hard copy Administrative building of AIIMS Nagpur scribing "Provision of Wall panelling in Dining area and Terrace Shaft Covering Works in Guest House building and Window Safety Grills in Adranwala Hostel at AIIMS Nagpur." on or before 02 Feb 2026 before 14:00 hrs., quotations will be opened on 09 Feb 2026 at 15:00 hrs.
- 11) The Firm is requested to visit the site to understand the actual condition of site / location. If any material to be transported, the cost shall be borne by the firm.
- 12) Firm to quote item wise rates. Evaluation will be total value wise. The work will be awarded to the lowest (L1) eligible vendor.
- 13) If any damaged occurred during execution, transportation the same shall be repaired or make Good by the vendor.
- 14) The work shall be completely carried out as per the description of each item with material of approved make and quality and as approved by the Engineer in charge.
- 15) Right to accept /reject any quotation rest with the AIIMS, Nagpur.
- 16) List of mandatory documents to be filled in by the vendor in various forms and submit the same with quotation within the period of bid submission.
 - i) Bidder details as per Annexure A.
 - ii) GST Registration Certificate.
 - iii) Copy of Signed NIQ


Superintending Engineer
AIIMS Nagpur

ANNEXURE- 'A'

(Form for Detailed Information of Vendor/Supplier.)


Name of Work: Provision of Wall panelling in Dining area and Terrace Shaft Covering Works in Guest House building and Window Safety Grills in Adranwala Hostel at AIIMS Nagpur

1.	Name of the Vendor/Supplier	
2.	Permanent Account Number (PAN)	
3.	Complete Postal Address of the Vendor /Supplier.	
4.	Particular of Bank Account	
	a) Name of Bank	
	b) Name of Bank Branch	
	c) Branch Code	
	d) Address	
	e) City	
	f) Telephone/ Mobile Number.	
5.	Legal status of Vendor/Supplier (Attach documents)	
	a) An Individual or b) A Proprietary Firm or c) A Firm in Partnership or d) A limited company or corporation	
6.	GST Registration Number	
7.	Valid Email ID of the Vendor/Supplier.	

Signature of the Vendor/Supplier

ANNEXURE- 'B'

(Reference Image for Item No. 07 PVC fluted wall Panel)

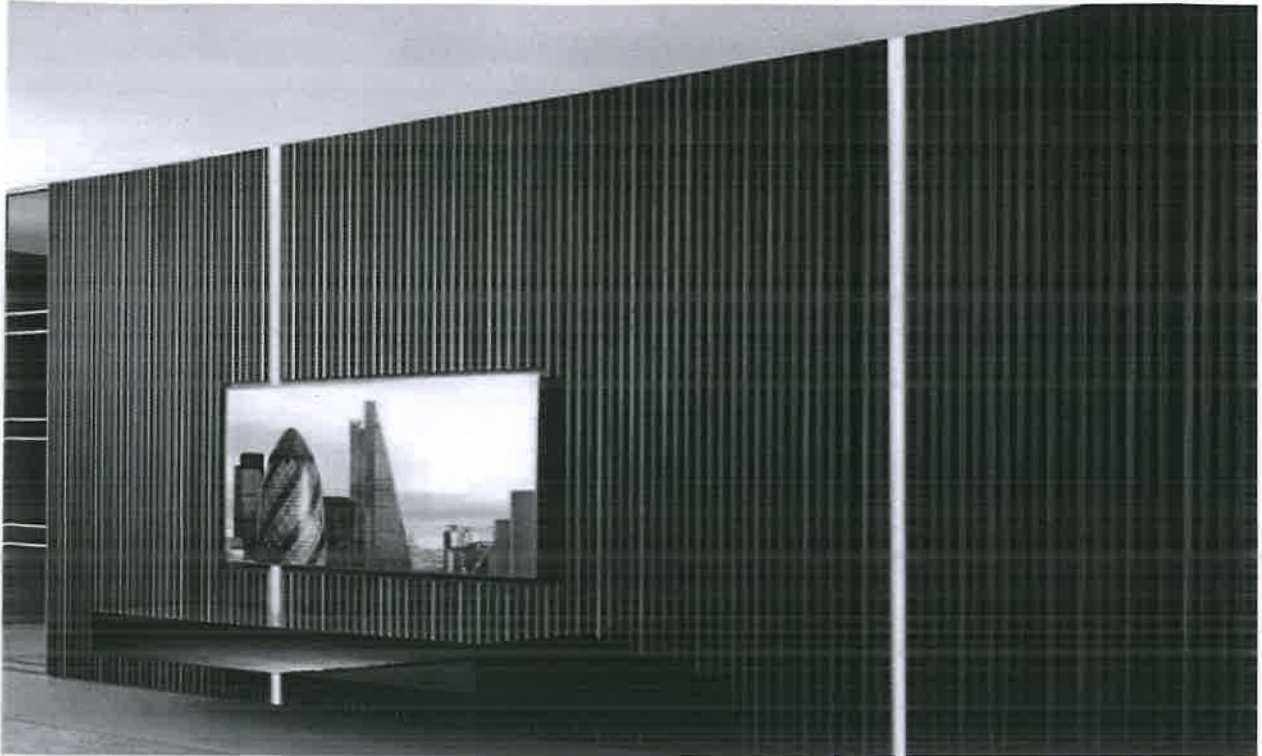

(Reference Image for Item No. 08 ACP Acrylic 3D letters Board glow sign)



